



## ▶ Hybrid stepper motors

**6600-20**  
automotive

- Step angle ..... 1.8°
- Size ..... Ø57.4 x 54.2 mm
- Weight ..... 470 g
- Holding torque.... 750 mNm


The hybrid stepper motor comes into its own where torque at low speed, positioning and accuracy are determining factors. This specific series is specially designed for high temperature and high vibration applications, as automotive, truck and off-road devices.

### ▶ Technical data

	Part N°	Phase resistance [Ω]	Phase inductance [mH]	Phase current [A]	Holding torque [mNm]	Nominal power [W]	Steps/rev.	200
Bipolar	6600-20-2-0.55	0.55	1.6	3.1	750	10.5	Step accuracy	± 5%
	6600-20-2-0.13	0.13	0.4	6.2	750	10.5	Rotor inertia	248 gcm <sup>2</sup>
							Insulation class	180 °C
							Insulation resistance	>100 MΩ
							Test voltage	500 VAC
							Detent torque	40 mNm


### ▶ Dimensions

Drawing not to scale. All dimensions in mm.

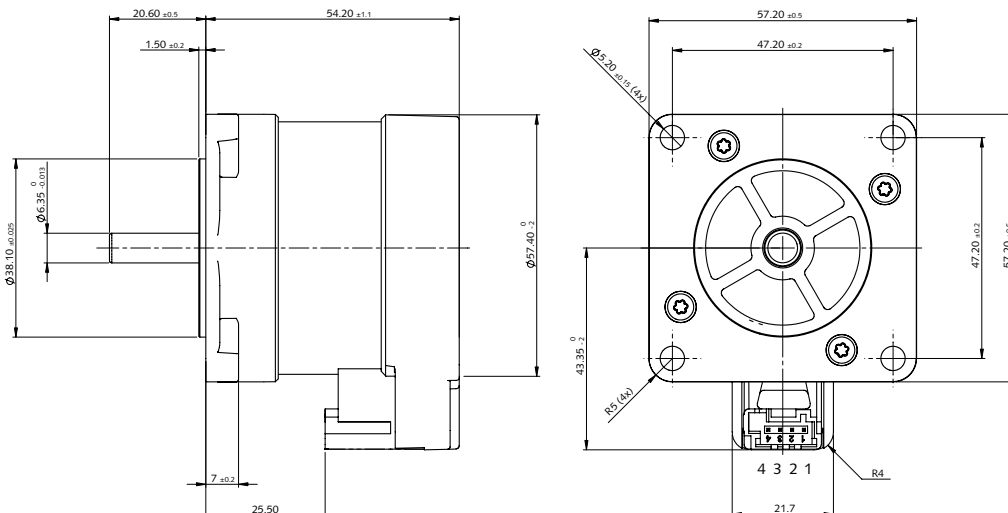


► Dynamic characteristics

• 6600-20-2-0.13

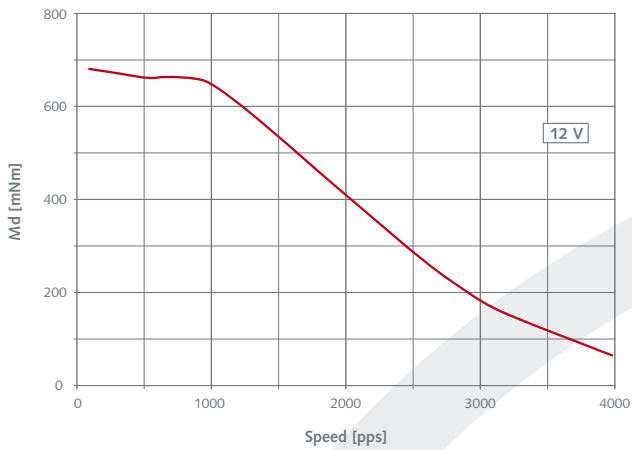



• 6600-20-2-0.55

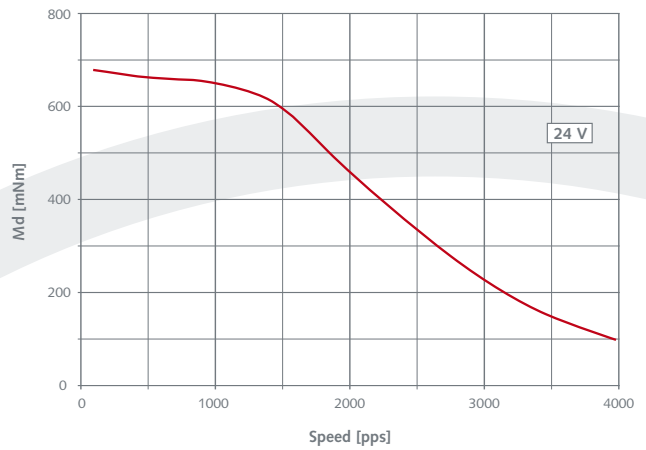


[pps] = pulses per second

► Electrical interface and steps sequence

• Steps sequence

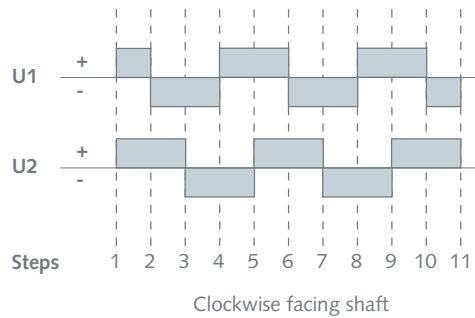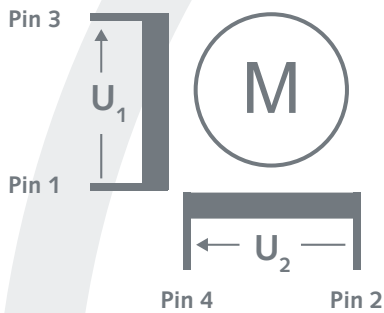

• Connection

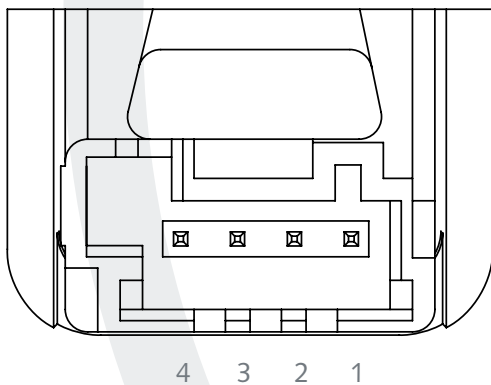

Connector type ..... Tyco AMP MQS C-208-15592  
Coding Black

Special requirements upon customer specifications. Right to change reserved.

< 1.1 >